

06/01/98

1c533 U.S. PRO

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.

P/61149.USP/GTU11/jog

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Ghani Abdul Muttalib ABBAS

For: DATA TRANSMISSION IN AN SDH NETWORK

1c533 U.S. PRO

09/144782

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL 063 832 963 US
- ☒ 16 Sheets of Spec.; 3 sheets of drawings.
- ☐ A certified copy of a _____ application.
- ☐ Declaration ☐ Signed. ☐ Unsigned.
- ☐ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Receipt Acknowledgement Postcard

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	22	- 20 =	2	x \$22.00	\$44.00
Indep. Claims	2	- 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$790.00
TOTAL FILING FEE					\$834.00

- ☒ A check in the amount of \$834.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 11-1145 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: September 1, 1998

Signature

Alan ISRAEL, Esq.
KIRSCHSTEIN, OTTINGER, ISRAEL
& SCHIFFMILLER, P.C.
489 Fifth Avenue
New York, New York 10017
Tel: (212) 697-3750
Fax: (212) 949-1690

cc:

Contiguous concatenation is defined in ITU standards such as G.707. Virtual concatenation for VC-2 has also been identified in ITU G.707 but the means for implementing it has not previously been defined and it has therefore not been implemented. Virtual concatenation for VC-4 has been proposed as a concept but no way of implementing has been devised until now. Furthermore, no method of performing conversion between contiguously concatenated signals and virtually concatenated signals has been defined.

Contiguous concatenation uses a concatenation indicator in the pointer associated with each concatenated frame to indicate to the pointer processor in the equipment that the VC's with which the pointers are associated are concatenated. For example, by contiguously concatenating four VC-4's an information structure with a data rate equivalent to a VC-4-4c could be created. The resulting VC-4-4c equivalent signal has only one path overhead (i.e. 9 bytes only). However many installed SDH networks cannot carry out the necessary processing to support contiguous concatenation. In order to implement contiguous concatenation in such SDH networks it would be necessary to modify the hardware of the equipment in order to handle the concatenated signal. Suitable modification of such a network would be prohibitively expensive.

This can cause a problem when the customer wishes to transfer data which requires a bandwidth too high for the installed SDH network to handle, such as some broadband services. For example a customer may wish to transfer data in VC-4-4c format but would be unable to transport it over current SDH networks which do not support concatenation.

The object of the invention is to provide an SDH network with the capability of carrying signals of increased bandwidth. A further object is to provide for the information content of an STM signal carrying data in contiguously concatenated virtual containers to be transmitted over an SDH network not itself capable of carrying contiguously concatenated signals.

SUMMARY OF THE INVENTION

The present invention provides a method for the transmission of data in a synchronous digital hierarchy (SDH) network comprising the steps of transmitting to a node of the network a form of data signal from outside the network, converting the signal into a virtually concatenated information structure and transporting the signal through the network in the virtually concatenated information structure wherein conversion of the signal comprises processing a path overhead of the signal wherein the integrity of the path overhead information is maintained.

The present invention advantageously provides a method for converting contiguously concatenated signals into virtually concatenated signals for transport in the network.

The present invention provides a means for carrying out either of the above methods.

The present invention also provides a synchronous digital hierarchy (SDH) network in which data is carried in a virtually concatenated information structure, the network comprising tributary cards arranged and configured to process signals received in contiguously concatenated form to convert them into virtually concatenated form for

transfer across the network.

In a preferred embodiment the data transfer is achieved by means of a virtually concatenated information structure equivalent to VC-4-4c comprising a set of four
5 virtually concatenated VC-4 signals. This virtually concatenated information structure is referred to in the following by the acronym "VC-4-4vc": this being chosen to reflect the fact that the data rate is the same as that of VC-4-4c, with the "vc" indicating virtual concatenation.

10 BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the invention will now be described by way of example with reference to the accompanying drawings in which

Figure 1 shows the information structure of a higher order, VC-4 signal of the prior art;

15

Figure 2, shows part of the structure of a lower order, VC-2 signal of the prior art;

Figure 3 shows the structure of a lower order, VC-12 signal of the prior art.

20 DETAILED DESCRIPTION OF THE INVENTION

Referring to Figure 1, this shows synchronous transfer module STM comprising a section overhead SOH, a pointer and a virtual container VC. The VC in turn comprises a path overhead POH, fixed stuff bytes and a container C for the payload.

A network management system manages the transfer of virtually concatenated VC-4's without any modification being required to network equipment. The only hardware modification required is the provision of modified tributary cards capable of identifying the receipt at the network boundary of contiguously concatenated VC-4's and processing them accordingly. Individual VC-4's and virtually concatenated VC-4's are transported in the SDH network in the same way. Hence, four VC-4's, when virtually concatenated, will still have four path overheads.

In the standard configuration a tributary card accepts at its input and delivers at its output an STM-4 signal containing four independent VC-4's (by way of example, each may contain a 140Mb/s, 3 x 34Mb/s or 63 x 2Mb/s mapped PDH signals). However, the new tributary card is also capable of accepting at its input and delivering at its output an STM-4 signal containing four contiguously concatenated VC-4 signals: as for example may arise from mapping ATM cells into STM-4 to ITU recommendations I.432 and G.707.

The tributary card will recognise the format of the incoming STM-4 signals: as a contiguously concatenated signal using the concatenation indication in the pointer and act accordingly.

Optionally, the tributary card could also be configured to handle STM-4 signals containing four virtually concatenated VC-4 signals, to meet future demand. The tributary card STM-4 interface meets the requirements of G.957 and G.958. The transport of the ATM/STM-4 signal over the SDH network is transparent and SDH

parameters processing and performance monitoring shall apply according to G.826, G.707, G.783 and ETS300 417.

At the ATM/STM-4 input port the pointers of the four concatenated VC-4's are aligned.

- 5 The resulting, newly generated four VC-4's are processed for transfer across the network as a virtually concatenated information structure (VC-4-4vc) signal by processing their associated path overheads as follows.

- 10 Whereas the pointer can indicate delay of the concatenated VC-4's in the VC-4-4vc of up to one frame duration (i.e. 125 μ s) higher delays cannot be picked up in this way. Since the differential delay between the VC-4s of a VC-4-4vc as they are transported across the SDH network are unknown, it is necessary to take steps to ensure that the VC-4s so transferred are in the correct sequence. The path trace (J1) value for each of the VC-4's in the VC-4-4vc is given a unique code indicating their order within the VC-4-4vc.
- 15

It is also necessary to ensure that the frames of each VC-4 in the VC-4-4vc are correctly ordered. The H4 byte is therefore used for frame sequence indication (FSI) to allow the network to recover the original sequence.

20

A signal label code is inserted in the C2 byte of each VC-4 of the VC-4-4vc to indicate the payload type, eg an ATM payload, as required. The B3 byte of the received contiguous VC-4-4c signal is processed, as appropriate, to maintain the path integrity.

On the back-plane port of the network node which receives the VC-4-4vc signal the virtually concatenated VC-4's of the VC-4-4vc are aligned using a buffer according to the information provided by the path trace values and the frame sequence values. The size of the buffer is dependent on the maximum differential delay allowed between the VC-4's which constitutes the VC-4-4vc. A value of 8 milliseconds is proposed, by way of example, based on the use of the H4 byte to indicate the frame sequence. However such a buffer size may prove prohibitively large. Therefore it may be necessary to reduce the buffer size by ensuring that the differential delay is kept to the absolute minimum. This may be achieved by ensuring that the four VC-4's in the VC-4-4vc are processed and switched together as well as being transmitted together in the same synchronous transfer module (STM), e.g. STM-4, STM-16, STM-64, and along the same route through the network.

Path trace mismatch on any of the VC-4 in the VC-4-4vc will result in trace mismatch defects on the VC-4-4vc signal. Similarly, signal label mismatch and loss of signal (LOS) of any VC-4 in the VC-4-4vc will result in alarm indication signal (AIS) in the VC-4-4vc.

The contents of the pointers, concatenation indicators and path overhead bytes of the contiguous concatenated VC are transported in other bytes or bits in the virtually concatenated VC. Suitable unused bits include some path overhead bytes of the virtually concatenated VC that are assigned to functions not used during virtual concatenation and the fixed stuff bits of the container four (C4) that forms part of the VC-4.

The pointers, concatenation indicators and path overhead bytes must be restored as appropriate before the signal is transmitted as a contiguous signal outside the network.

The path overhead information in the first VC-4 frame in the received virtual concatenated VC-4-4vc signal is inserted in the path overhead of the contiguous

5 concatenated VC-4-4c signal generated by the network for transmission outside the network. Additionally, the B3 value is corrected as appropriate to maintain the path's integrity and is inserted in the contiguous VC-4-4c path overhead. Thus the output port delivers an STM signal identical to that presented at the input port.

10 In a typical system performance reports and alarms would be passed to the element manager (EM). The EM (and SDH network management system) may be required to configure the VC-4's which constitute the VC-4-4vc in a preferred manner.

The invention is not limited to only VC-4-4c or VC-4-4vc. The invention applies to any
15 number of VC-4s (ie. VC-4-nc or nvc where n may be in the range of 2-64 or higher)

The above embodiment is described by way of example only and does not limit the scope of the invention. In particular the present invention applies equally to signals and information structures other than VC-4, for example to VC-3, VC-2 and VC-1. Virtual
20 container signal structures (including VC-4, AU3/VC-3, TU3/VC-3, VC-2 and VC-12) are defined by the ITU, for example in ITU-T G.707 (Draft) 11/95 published 1995.

The arrangement and method of this invention as described above in relation to VC-4 also applies to VC-3 signals. In particular the path overhead of these two signals is

exactly similar, allowing the same method for processing of overhead bytes to be used for both types of signal. This applies equally to administrative unit three (AU3) VC-3 as to tributary unit three (TU3) VC-3 signals.

- 5 Referring to Figure 2, this shows part of the structure of a lower order virtual container VC-2. In Figure 2 only the first column of the VC-2 is shown to illustrate the positioning of the path overhead (POH) bytes V5, J2, N2 and K4. Also shown are fixed stuff bits R and data bits D. The fixed stuff bits of the first column make up eight whole bytes and other stuff bits and bytes are included in subsequent columns (not shown).
- 10 The subsequent columns (not shown) comprise further data bits and bytes, together with overhead bits, justification opportunity bits and justification control bits the precise function of which is not relevant to the present disclosure but is detailed in the above ITU-T publication.
- 15 Referring to Figure 3, this shows the structure of a lower order virtual container VC-12 with path overhead (POH) bytes V5, J2, N2 and K4. Data is carried in three units of 32 bytes plus one unit of 31 bytes. Other bytes are variously made up of fixed stuff bytes R, overhead bits O, justification opportunity bits S, justification control bits C and data bits D. The fixed stuff bits R make up five whole bytes and parts of three other bytes
- 20 with a total of 49 bits. The precise functions of the other bits are not relevant to the present disclosure but are also detailed in the above ITU-T publication.

With lower order VCs (ie VC-2s and VC-1s) the conversion of the path overhead bytes will be slightly different. Accordingly to the invention, the contents of the V5, J2, N2

and K4 overhead bytes of the contiguous concatenated VC-2 and VC-1 signals (e.g. VC-2-5c or VC-12-4c), are transported in other bytes or bits in the virtually concatenated VC-2s/VC-1s. Suitable unused bits are the fixed stuff bits R or overhead bits O. These overhead bytes are restored before the signal is re-transmitted as a contiguous signal outside the network.

Thus VC-4, VC-3, VC-2 and VC-1 can all be transmitted as virtually or contiguously concatenated signals over ATM or PDH networks.

WHAT I CLAIM IS

1. A method for the transmission of data in a synchronous digital hierarchy (SDH) network comprising the steps of transmitting to a node of the network a form of data signal from outside the network, converting the signal into a virtually concatenated information structure and transporting the signal through the network in the virtually concatenated information structure wherein conversion of the signal comprises processing a path overhead of the signal wherein the integrity of the path overhead information is maintained.
2. The method of Claim 1 comprising the step of converting the signal so transported into a signal of the same form as that transmitted to the network wherein conversion of the signal comprises processing a path overhead of the signal wherein the integrity of the path overhead information is maintained.
3. The method of Claim 1 wherein the signal transmitted to the network from outside the network is in contiguously concatenated form.
4. The method of Claim 1 wherein the data signal from outside the network comprises a virtual container four (VC-4) or virtual container three (VC-3).
5. The method of Claim 4 wherein the path overhead comprises bytes H4, J1 and B3; and the VC-4 and VC-3 comprise a plurality of frames, the step of processing the path overhead including the steps of using byte H4 for indicating

frame sequence within the VC-4 or VC-3 using byte J1 to indicate the order of VC-4s or VC-3s in a virtually concatenated information structure and correcting, as necessary, the error indication information carried in byte B3.

6. The method of Claim 5 comprising the steps of transmitting to a node of the network a signal from outside the network in a form comprising four contiguously concatenated VC-4s and processing the four VC-4s into a virtually concatenated information structure comprising virtually concatenated VC-4s for transfer across the network.
7. The method of Claim 5 comprising the steps of transmitting to a node of the network a signal from outside the network in a form comprising five contiguously concatenated VC-3s and processing the five VC-3s into a virtually concatenated information structure comprising virtually concatenated VC-3s for transfer across the network.
8. The method of Claim 6 comprising the step of aligning the virtually concatenated virtual containers (VCs) of the virtually concatenated information structure using a buffer.
9. The method of Claim 8 comprising the step of controlling the alignment according to the contents of bytes J1 and H4.
10. The method of Claim 6 comprising the steps of switching and transmitting the

VC-4 or VC-3 frames of the virtually concatenated information structure through the network together in a single synchronous transfer module (STM) or in multiple STMs and via the same route.

11. The method of Claim 1 wherein the data signal from outside the network comprises a virtual container two (VC-2) or a virtual container one (VC-1).
12. The method of Claim 11 wherein the path overhead comprises bytes V5, J2, N2 and K4 and wherein the step of processing the path overhead includes the step transferring the contents of the path overhead bytes to unused parts of the signal.
13. The method of Claim 12 comprising the steps of transmitting to a node of the network a signal from outside the network in a form comprising two or more contiguously concatenated VC-2s or VC-1s and processing the VC-2s or VC-1s into a virtually concatenated information structure comprising virtually concatenated VC-2s or VC-1s for transfer across the network.
14. The method of Claim 13 comprising the step of aligning the virtually concatenated VCs of the virtually concatenated information structure using a buffer.
15. The method of Claim 14 comprising the step of controlling the alignment according to the contents of the path overhead bytes transferred to the unused part of the signal.

16. The method of Claim 13 in which the contiguously concatenated VC-2s or VC-1s received from outside the network comprise a plurality of frames in a set sequence, and in which the sequence of the frames may change whilst being transported through the network, the method comprising the step of re-ordering the frames into the set sequence as required.
17. The method of Claim 13 in which the VC-2s and VC-1s comprise a plurality of frames, the method comprising the steps of switching and transmitting the VC-2 or VC-1 frames of the virtually concatenated information structure through the network together in a single synchronous transfer module (STM) or in multiple STMs and via the same route.
18. The method of Claim 1 comprising the step of recognising the receipt of a signal in concatenated form by the network.
19. A synchronous digital hierarchy (SDH) network in which data is carried in a virtually concatenated information structure, the network comprising tributary cards arranged and configured to process signals received in contiguously concatenated form to convert them into virtually concatenated form for transfer across the network.
20. The network of Claim 19 wherein the tributary cards are arranged and configured to process signals transferred across the network in virtually

concatenated form and to convert them into contiguously concatenated form.

21. The network of Claim 20 wherein the signals in virtually concatenated form comprise virtual containers (VC) and the tributary cards comprise one or more buffers for aligning said virtual containers (VC).
22. The network of the Claim 19 wherein the tributary cards are configured and arranged to detect the receipt of signals in contiguously concatenated form by detecting a concatenation indication of the signals received.

ABSTRACT OF THE DISCLOSURE

A method for the transmission of data in a synchronous digital hierarchy (SDH) network comprising the steps of transmitting to a node of the network a form of data signal from outside the network, converting the signal into a virtually concatenated information structure and transporting the signal through the network in the virtually concatenated information structure; means for carrying out the method and tributary cards arranged and configured to process signals received in contiguously concatenated form to convert them into virtually concatenated form for transfer across the network; thus providing for data transmitted in high-bandwidth, contiguously concatenated signals (ie VC-4-4c) to be transported across a SDH network, not itself capable of carrying contiguously concatenated signals.

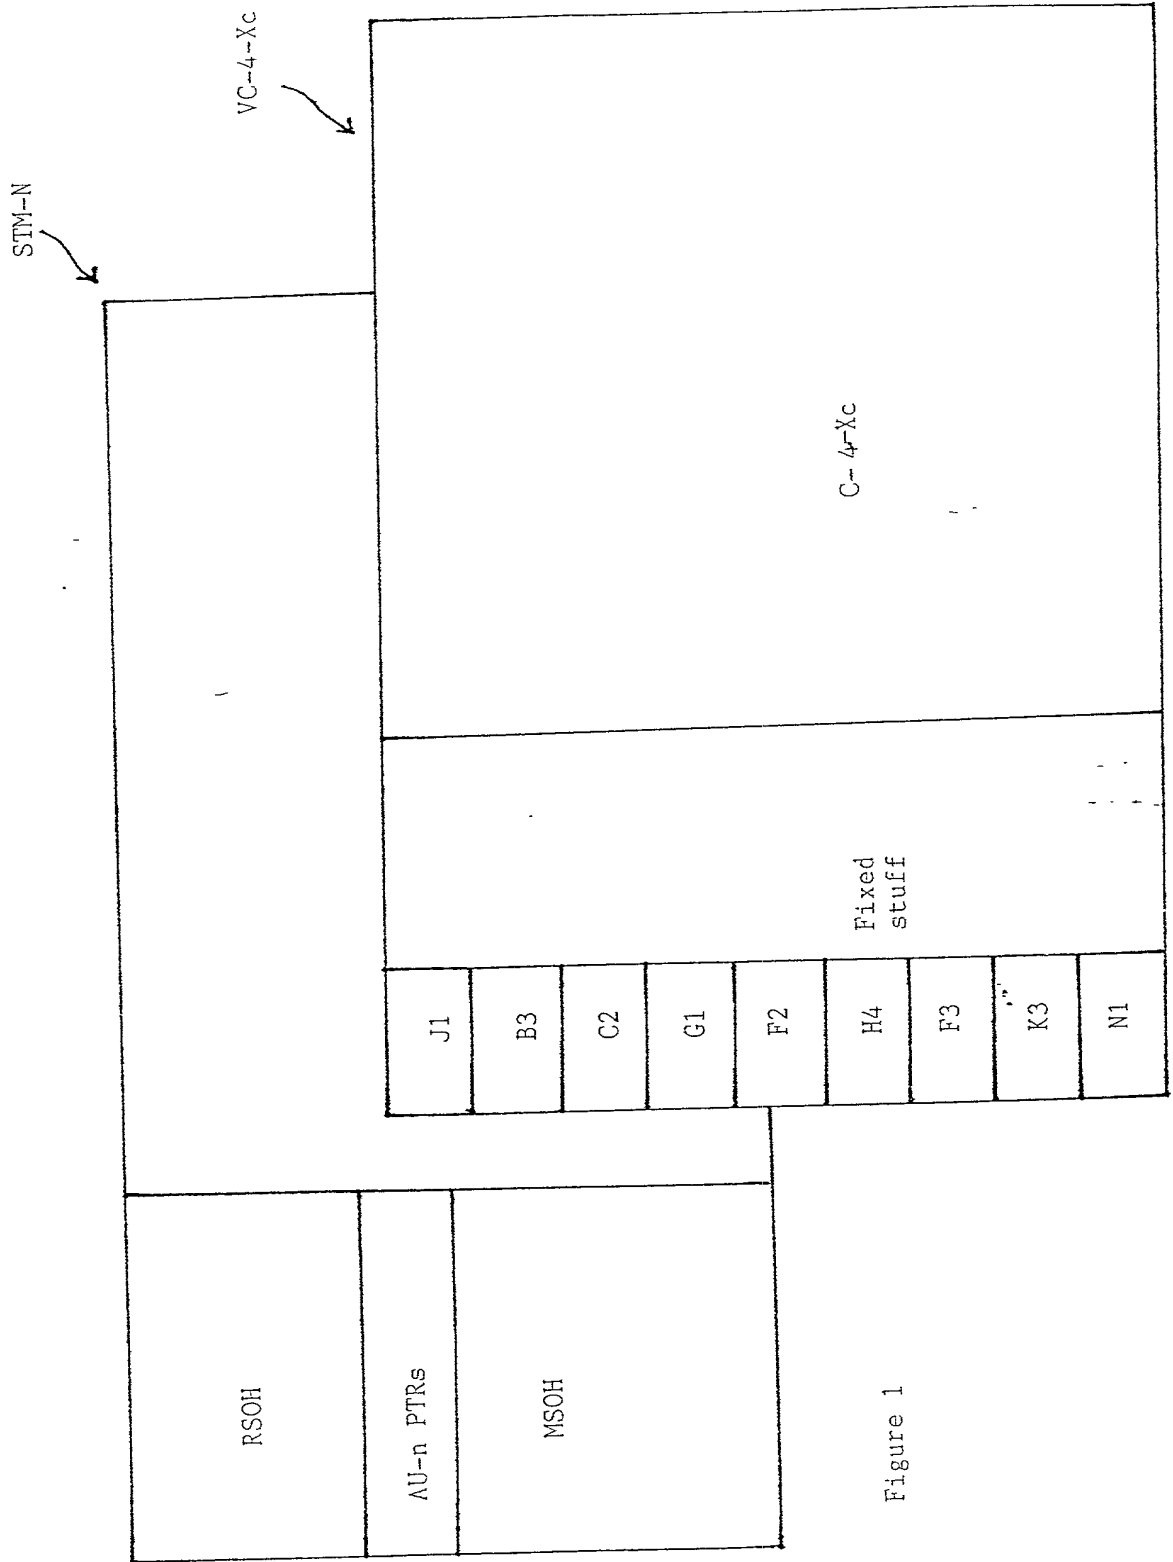


Figure 1

V5
RRRRRRRR
DDDDDDDD
RRRRRRRR
J2
RRRRRRRR
DDDDDDDD
RRRRRRRR
N2
RRRRRRRR
DDDDDDDD
RRRRRRRR
K4
RRRRRRRR
DDDDDDDD
RRRRRRRR

Figure 2

V5
RRRRRRRR
32 BYTES
RRRRRRRR
J2
C ₁ C ₂ OOOORR
32 BYTES
RRRRRRRR
N2
C ₁ C ₂ OOOORR
32 BYTES
RRRRRRRR
K4
C ₁ C ₂ RRRRRS ₁
S ₂ DDDDDDDD
31 BYTES
RRRRRRRR

Figure 3